

**TANKJET 23240 TANK CLEANING NOZZLE
FEATURES AND BENEFITS**

- Compact, fluid-driven, rotating nozzles efficiently rinse vessels
- Two flat sprays produce the self-rotating force and side sprays; an optional third spray at the end of the nozzle, provides nearly full spherical coverage
- Long-wearing materials extend service life and enable operation at high temperatures
- Available in electro-polish finish or stainless steel
- Wall mount options available

SPECIFICATIONS

TankJet 23240 Tank Cleaning Nozzle	
Max. tank diameter:	3 ft. (0.9 m)
Operating principle:	Fluid-driven reactionary force
Flow rate:	3.5 to 22 gpm (14.0 to 79 lpm)
Operating pressure:	20 to 200 psi (1.4 to 13.8 bar)
Max. temperature:	350°F (177°C)
Materials:	316 stainless steel, hardened stainless steel and 50% stainless steel filled PTFE (316SS)
Inlet connection:	1/2" NPT or BSPT (F)
Optional accessories:	Strainers, recommended mesh size: 200 (74 microns) See page G2

IDEAL FOR CLEANING:

- Barrels
- Cylinders
- Ducts
- Kegs
- Pipes
- Tube



SPRAY COVERAGE

2 Side Spray



3 360°



MOUNTING OPTIONS

Vertical




TankJet 23240-3 tank cleaning nozzle

TankJet 23240-2 tank cleaning nozzle

DIMENSIONS AND WEIGHTS

Model	L in. (mm)	W in. (mm)	Min. Tank Opening in. (mm)	Weight oz. (kg)
23240	3.5 (89)	1 (25.4)	1.03 (26)	8.0 (0.23)




PERFORMANCE DATA

Model	Coverage Type	Capacity Size	Liquid Flow Capacity gpm (lpm)							
			20 psi (1.4 bar)	40 psi (2.8 bar)	60 psi (4.1 bar)	80 psi (5.5 bar)	100 psi (6.9 bar)	120 psi (8.3 bar)	150 psi (10.3 bar)	200 psi (13.8 bar)
23240	2	5	3.5 (14.0)	5.0 (19.7)	6.1 (23)	7.1 (25)	7.9 (28)	8.7 (32)	9.7 (36)	11.2 (39)
		8	5.7 (22)	8.0 (32)	9.8 (36)	11.3 (41)	12.6 (45)	13.9 (52)	15.5 (58)	17.9 (63)
	3	5.7	4.0 (15.9)	5.7 (22)	7.0 (26)	8.1 (29)	9.0 (32)	9.9 (37)	11.0 (41)	12.7 (45)
		7	4.9 (19.5)	7.0 (28)	8.6 (32)	9.9 (36)	11.1 (39)	12.1 (45)	13.6 (50)	15.7 (55)
		10	7.1 (28)	10.0 (39)	12.2 (46)	14.1 (51)	15.8 (56)	17.3 (64)	19.4 (72)	22 (79)

ORDERING INFORMATION

TANKJET 23240 TANK CLEANING NOZZLE

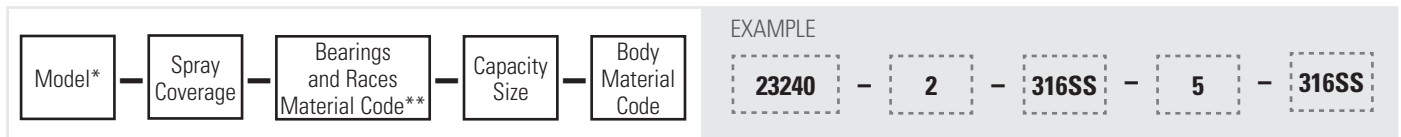

*Add B prior to the Model type for BSPT connections.

**All bearings and races specify 316SS for Stainless Steel Type 316 (DIN 1.4571).

