


RotoClean® SPRAY ATTACHMENTS, AIRLESS SPRAY



FLAT SPRAY NOZZLES

106A



Maximum pressure of
4000 psi (275 bar)

225



Maximum pressure of
5000 psi (344 bar)

FEATURES AND BENEFITS

- Quick and easy method of unclogging spray tips without removing them from the spray gun in airless painting and high pressure spraying applications.
- Attaches to the spray gun and can be rotated 180° to allow obstructions to be blown out the larger opening in the back of the tip as liquid passes through the spray gun.
- Constructed with durable tungsten carbide orifice inserts, the RotoClean spray attachments are small, lightweight and operate at pressures up to 5000 psi (344 bar) for 225 insert kit.
- Models are available to fit all leading brands of airless spray guns.


INSERT KITS

FOR 106A



No. RC – orifice insert

FOR 225




No. 26081 – handle/orifice insert ASB

APPLICATIONS

- Airless painting
- Pressure cleaning

SEE ALSO

- High pressure strainers
- Special coating tips – ROBTC, ECRTC
- UniJet® TC Tips

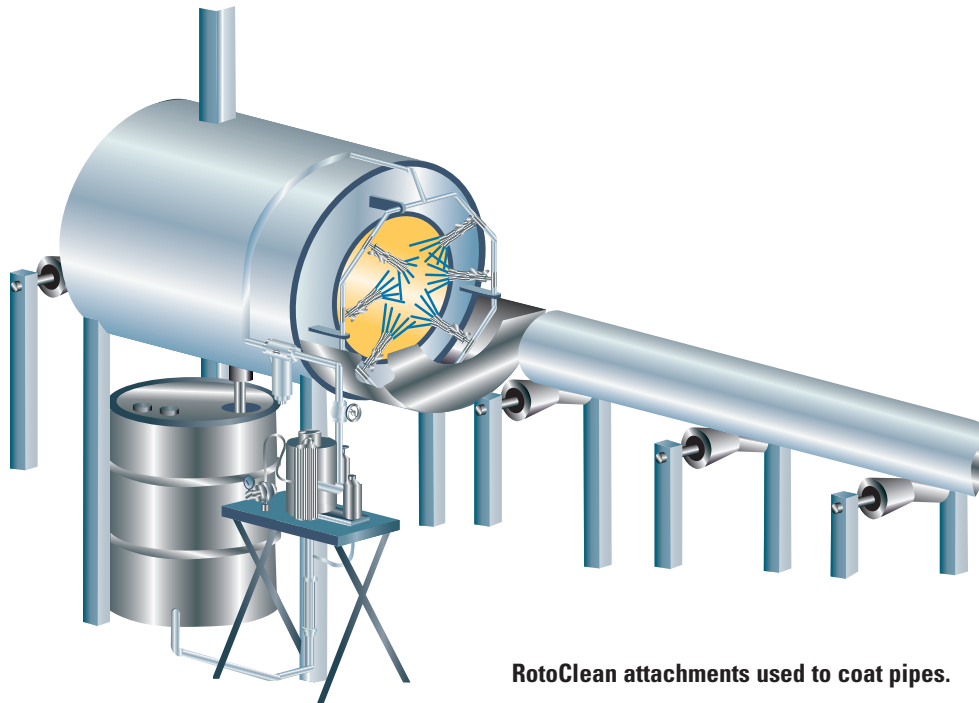

RotoClean attachments used to coat pipes.

