


# IN-LINE *WhirlJet*® SPRAY NOZZLES, STANDARD SPRAY



## FEATURES AND BENEFITS

- Hollow cone spray pattern with a ring-shaped impact area.
- Small- to medium-sized drops.
- Lower profile projection for installation in a tee or pipe header.
- Uniform distribution over a wide range of flow rates and pressures.
- Interchangeable spray caps within each inlet connection size group for maximum versatility.
- BDM features recessed orifice area to protect from damage; self locking cap to prevent loss due to vibration; fiberglass-reinforced nylon inlet body.

### BD



Removable cap  
3/8" to 1-1/2" NPT or BSPT (M)

### BDM



Removable cap/nylon body  
3/8" NPT or BSPT (M)

## OPTIMIZATION TIPS



- See page D2 for optimization tips.

## APPLICATIONS

- Brine spraying
- Dust control
- Gas scrubbing, washing, cooling
- Metal treating
- Product degreasing
- Water aerating
- Water cooling

## SEE ALSO

- Accessories
  - Adjustable ball fittings
  - Pressure gauges
  - Pressure regulators
  - Solenoid valves
  - Split-eyelet connectors
  - Strainers
  - Swivel connectors
- High Capacity SprayDry® Nozzles

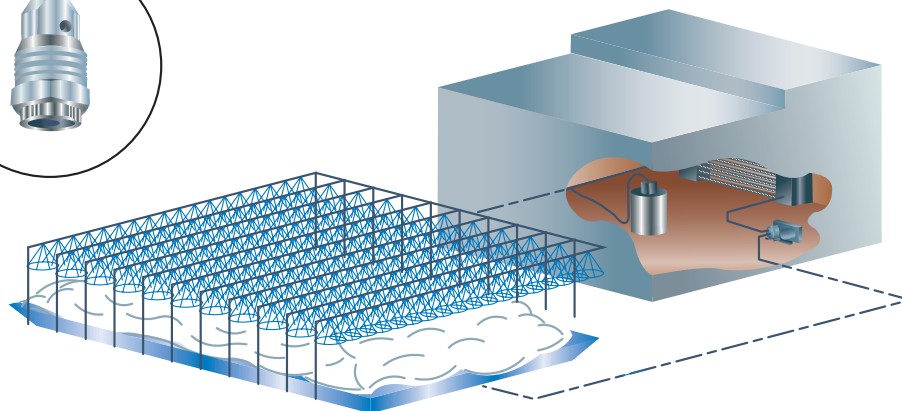

In-line WhirlJet nozzles spray water/bacteria mixture to create snow piles for refrigeration.

