

HD15 IN-LINE HEATER SYSTEM

FEATURES

ELIMINATES PRODUCT LOSS DUE TO UNEVEN COATING AND NOZZLE CLOGGING. IN-LINE CONSTRUCTION ALLOW HEATING TO BE ACHIEVED ONLY ON-DEMAND FOR OPTIMAL RESPONSE AND ENERGY EFFICIENCY.

NOTE - ONLY USED WITH LIQUID RECIRCULATION TO SUPPLY SOURCE.

SPRAY CONTROL PANEL

COMPATIBLE WITH THE 1000+, 1750+ AND 2150+ SPRAY CONTROL PANELS.

SPECIFICATIONS:

- MAXIMUM FLOW: 0.5 GPM (1.9 LPM)
- DIGITAL TEMPERATURE SET POINT: 130°F MAX. (54.4°C)
- WETTED COMPONENTS: 316 STAINLESS STEEL AND VITON® SEALS
- 1.5KW HEATING CAPACITY

AT 0.5 GPM (1.9 LPM), THE HEATER CAN HEAT LIGHT TO MEDIUM WEIGHT OILS FROM 70°F TO 120°F (21°C TO 49°C)

HEATER CONTROL PANELS USED IN KITS:

THREADED


-04CHICP1K5301W0 -120VAC/1PH/60HZ, 15A

-04CHICP1K5301W5 -230VAC/1PH/50HZ, 8A

SANITARY

-04CHIE11K5401W0 -120VAC/1PH/60HZ, 15A

-04CHIE11K5401W5 -230VAC/1PH/50HZ, 8A

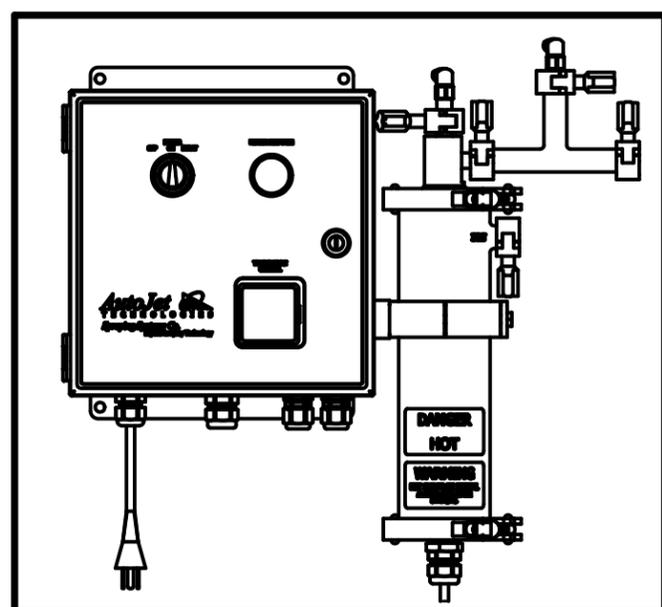

ALTERNATE SANITARY VERSION
3/4" SANITARY CONNECTIONS

DESCRIPTION:
AccuCoat HD-15 In-Line Heater Spray System



Spraying Systems Co.®
Spray Nozzles and Accessories
P.O. Box 7900 - Wheaton, IL 60187-7901

REVISION NO. 1	Data Sheet No. 116332
REVISION DATE: 5/2022	SHEET: 1 OF 1 DWG SIZE: B