

# Flat Glass Manufacturer Reduces Scrap by 75% with Automated Spray Coating System



## Problem:

A glass manufacturer needed to apply a thin coating of zinc citrate on flat glass while it was on the float line. The coating protects the glass from corrosion and discoloration.

The challenges were numerous. Coating across the full width of the glass ribbon needed to be uniform to ensure product quality. Frequent nozzle clogging was causing high scrap rates. Consistent application volume was critical even though variations in glass thickness required different application rates and line speeds varied greatly.

Reducing operating costs was also desirable. The existing system used air atomizing nozzles, wasted zinc citrate solution, required mist extraction equipment and needed extensive daily maintenance.

## Solution:

An AutoJet® Spray System with 12 electrically-actuated hydraulic PulsaJet® spray nozzles provides the necessary flexibility and precision. Powered by a Model 2250 AutoJet Spray Controller, the system accurately adjusts the flow of zinc citrate solution with Precision Spray Control (PSC). Spray pressure remains constant with PSC, enabling the optimal spray angle to be maintained despite changes in flow rate. This ensures uniform coverage across the width of the ribbon.

Changing the frequency and duty cycle of each nozzle instantaneously adjusts flow rate for line speed changes and maintains the correct volume of coating. Nozzles can also be activated individually to accommodate different ribbon widths.

In addition to repeatable spray precision, the turnkey AutoJet Spray System is easy to operate and maintain. The system requires no compressed air and has eliminated clogging and misting problems. The nozzles are mounted on a 3800 mm (150") wide frame which can easily be rolled away from the production line for quick maintenance.

The system mixes the water and zinc citrate solution on demand, eliminating the need to store pre-mixed coating. An optional reverse osmosis unit that produces demineralized and softened water without the use of hydrochloric acid and sodium hydroxide is available.



# Flat Glass Manufacturer Reduces Scrap by 75% with Automated Spray Coating System – Continued

## Results:

The AutoJet® Spray System ensures product quality by providing uniform coating across the full width of the glass ribbon regardless of line speed, ribbon width or thickness of glass. Clogging problems, costly compressed air use and the need for mist extraction equipment have been eliminated.

The scrap rate for the float glass line has decreased by 75% and consumption of the zinc citrate solution has been reduced by more than 60%. Maintenance time on the spray system has decreased from an hour each day to only three hours per month. These factors combined to provide a payback of less than one month for the AutoJet Spray System.


## A CLOSER LOOK AT THE SYSTEM

Each PulsaJet® nozzle covers 300 mm (12") and can be activated individually or in groups to evenly coat glass ribbons of any width.



**AutoJet Spray Controllers** provide easy control of nozzles and cycle times up to 18,000 cycles per minute.

## Precision Spray Control

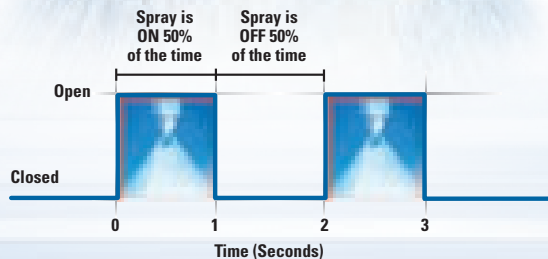

**Precision Spray Control (PSC)** involves switching spray nozzles on and off very quickly in order to control the flow rate. This cycling takes place so quickly that the flow often appears to be constant. PSC requires the use of electrically-actuated nozzles and an AutoJet spray controller.

### The Benefits of Precision Spray Control

- Achieve a wide range of flow rates from a single nozzle at a constant pressure. By adjusting duty cycle and cycling frequency instead of changing pressure to increase flow rates, spray angle and drop size remain consistent
- Flow rate can be changed almost instantaneously
- Reduced clogging. PSC can maintain very low flows with larger spray orifices



**Spraying Systems Co.®**  
Experts in Spray Technology

North Avenue and Schmale Road, P.O. Box 7900, Wheaton, IL 60187-7901 USA

Tel: 1.800.95.SPRAY Intl. Tel: 1.630.665.5000

Fax: 1.888.95.SPRAY Intl. Fax: 1.630.260.0842

www.spray.com

