



D55606 Series

Features

- creates stable solid jet with high impact
- special internal design to stabilize incoming turbulent swirling flow
- should be used on tank washer AA(B)190
- currently available in 1.4305
- connection BSPT
- datasheet [DS55606-1](#)


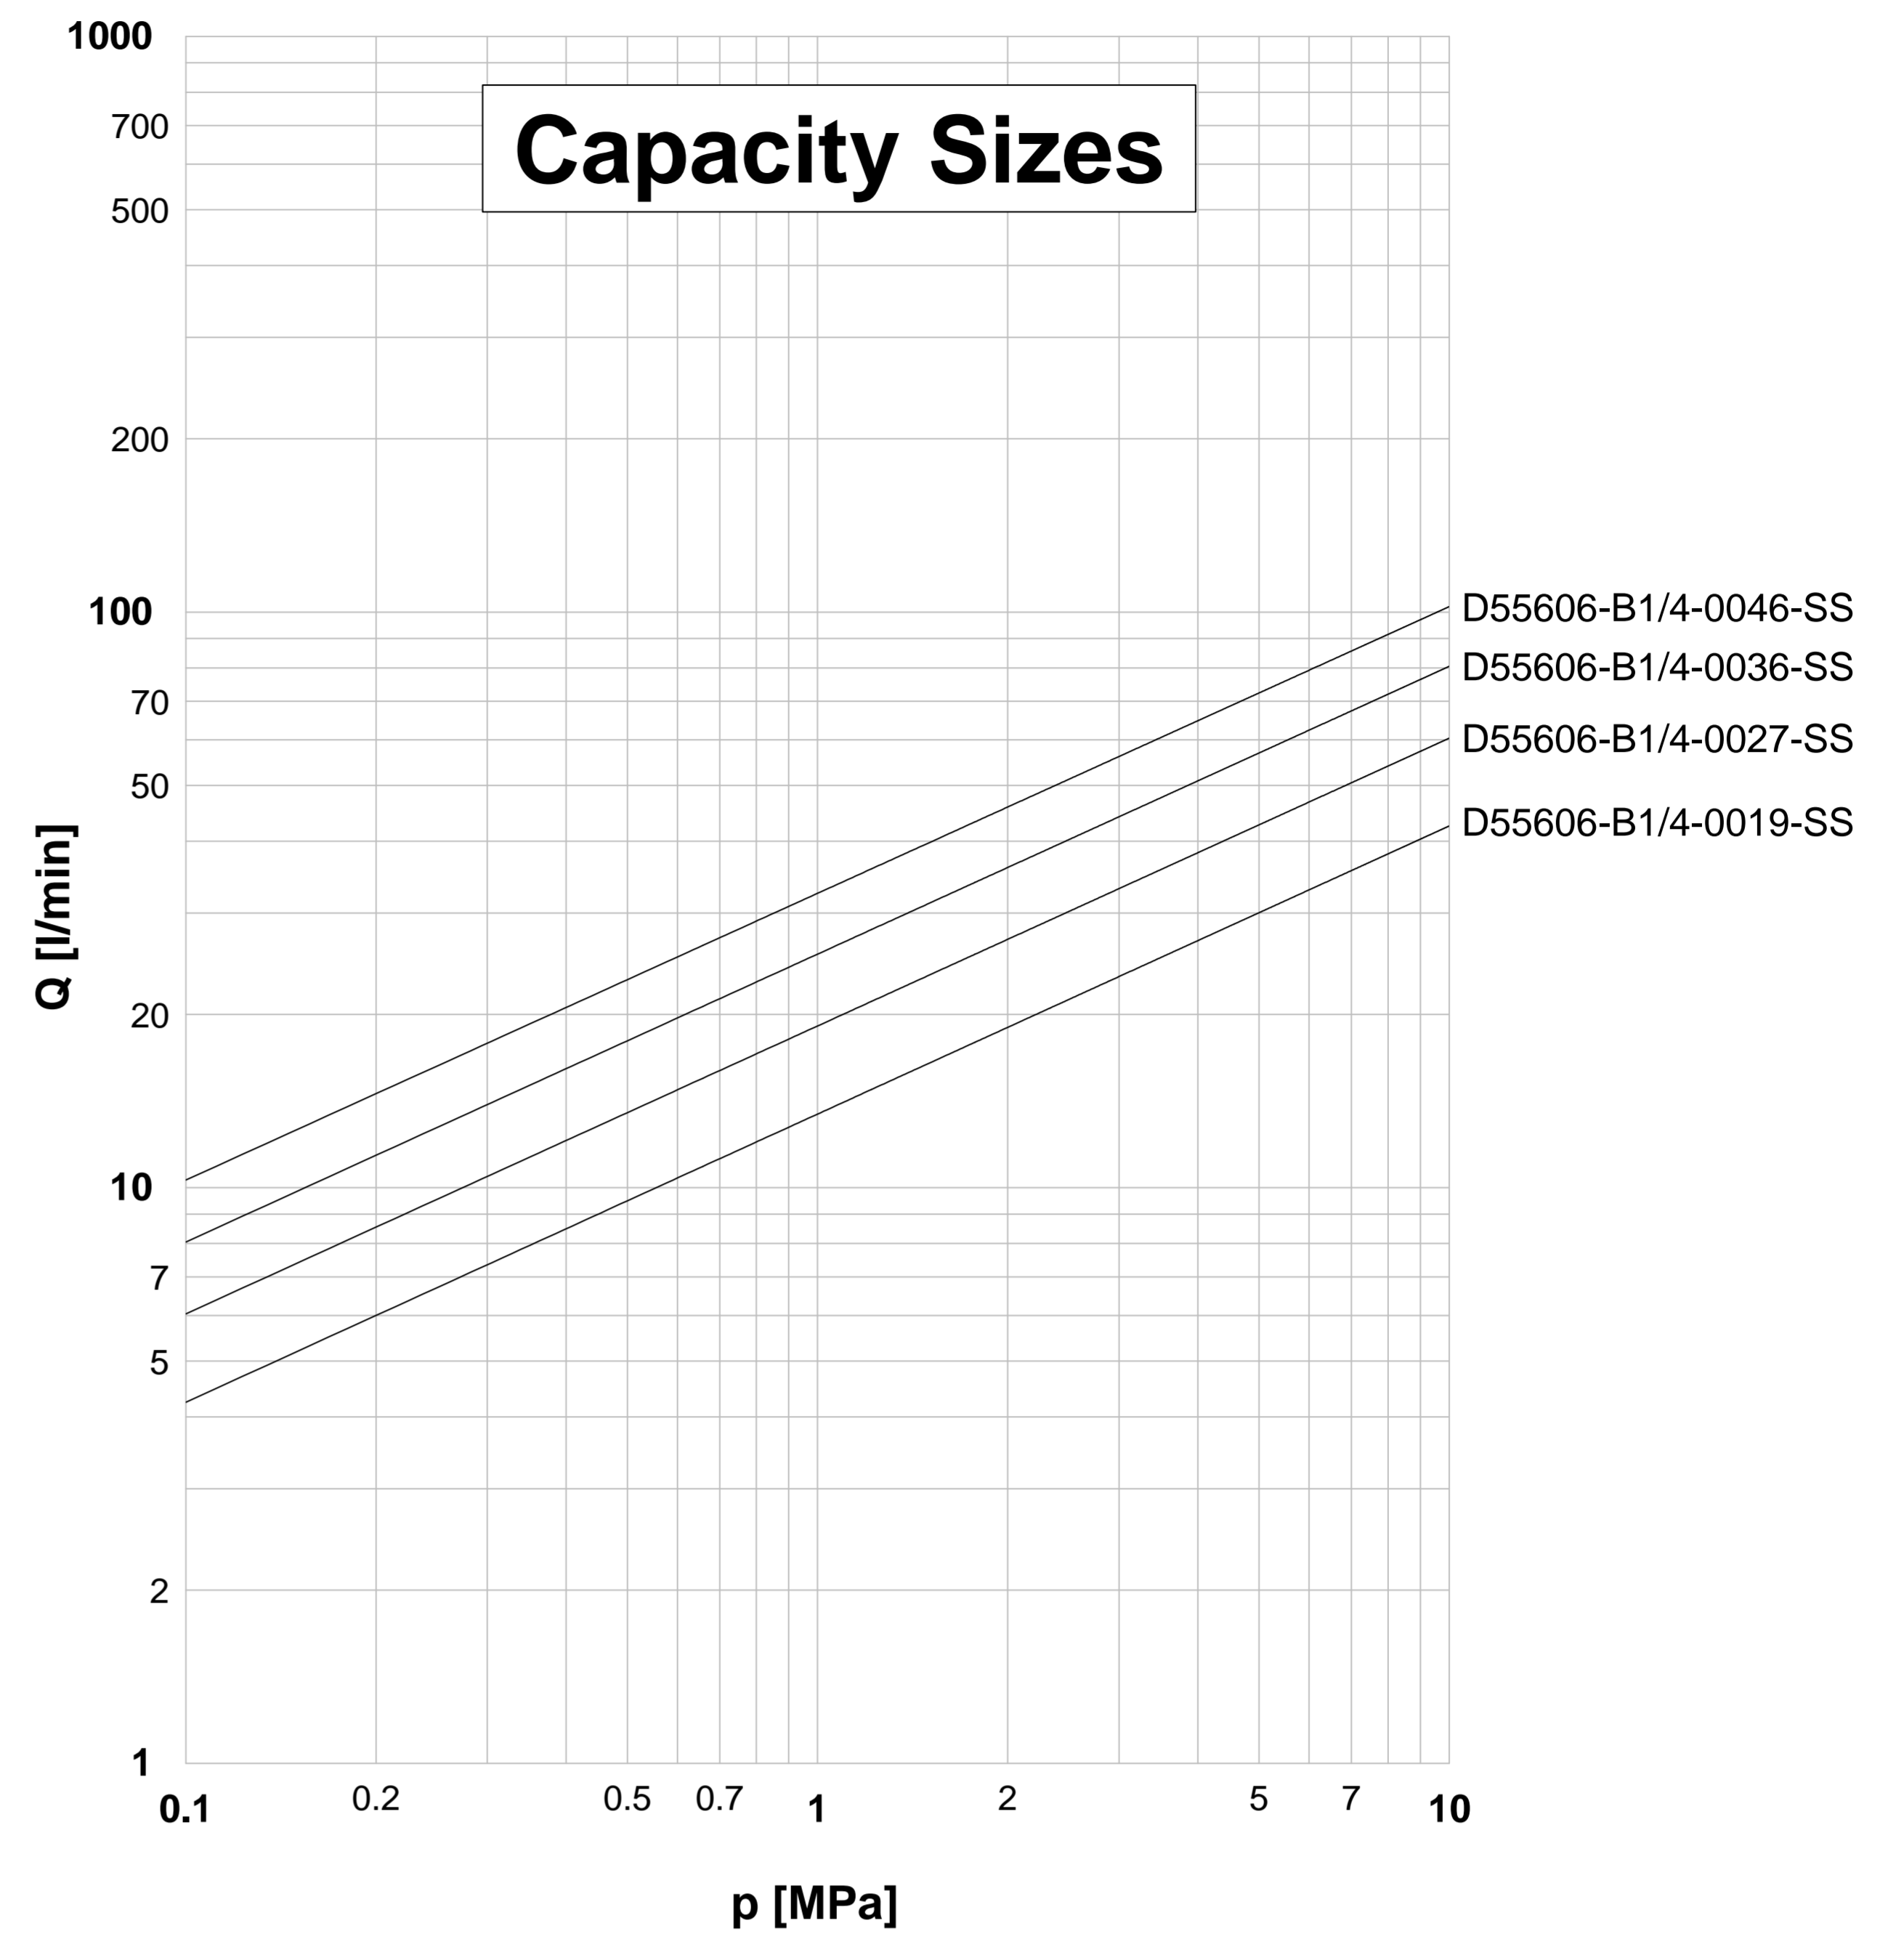


Solid Jet Impact Comparison

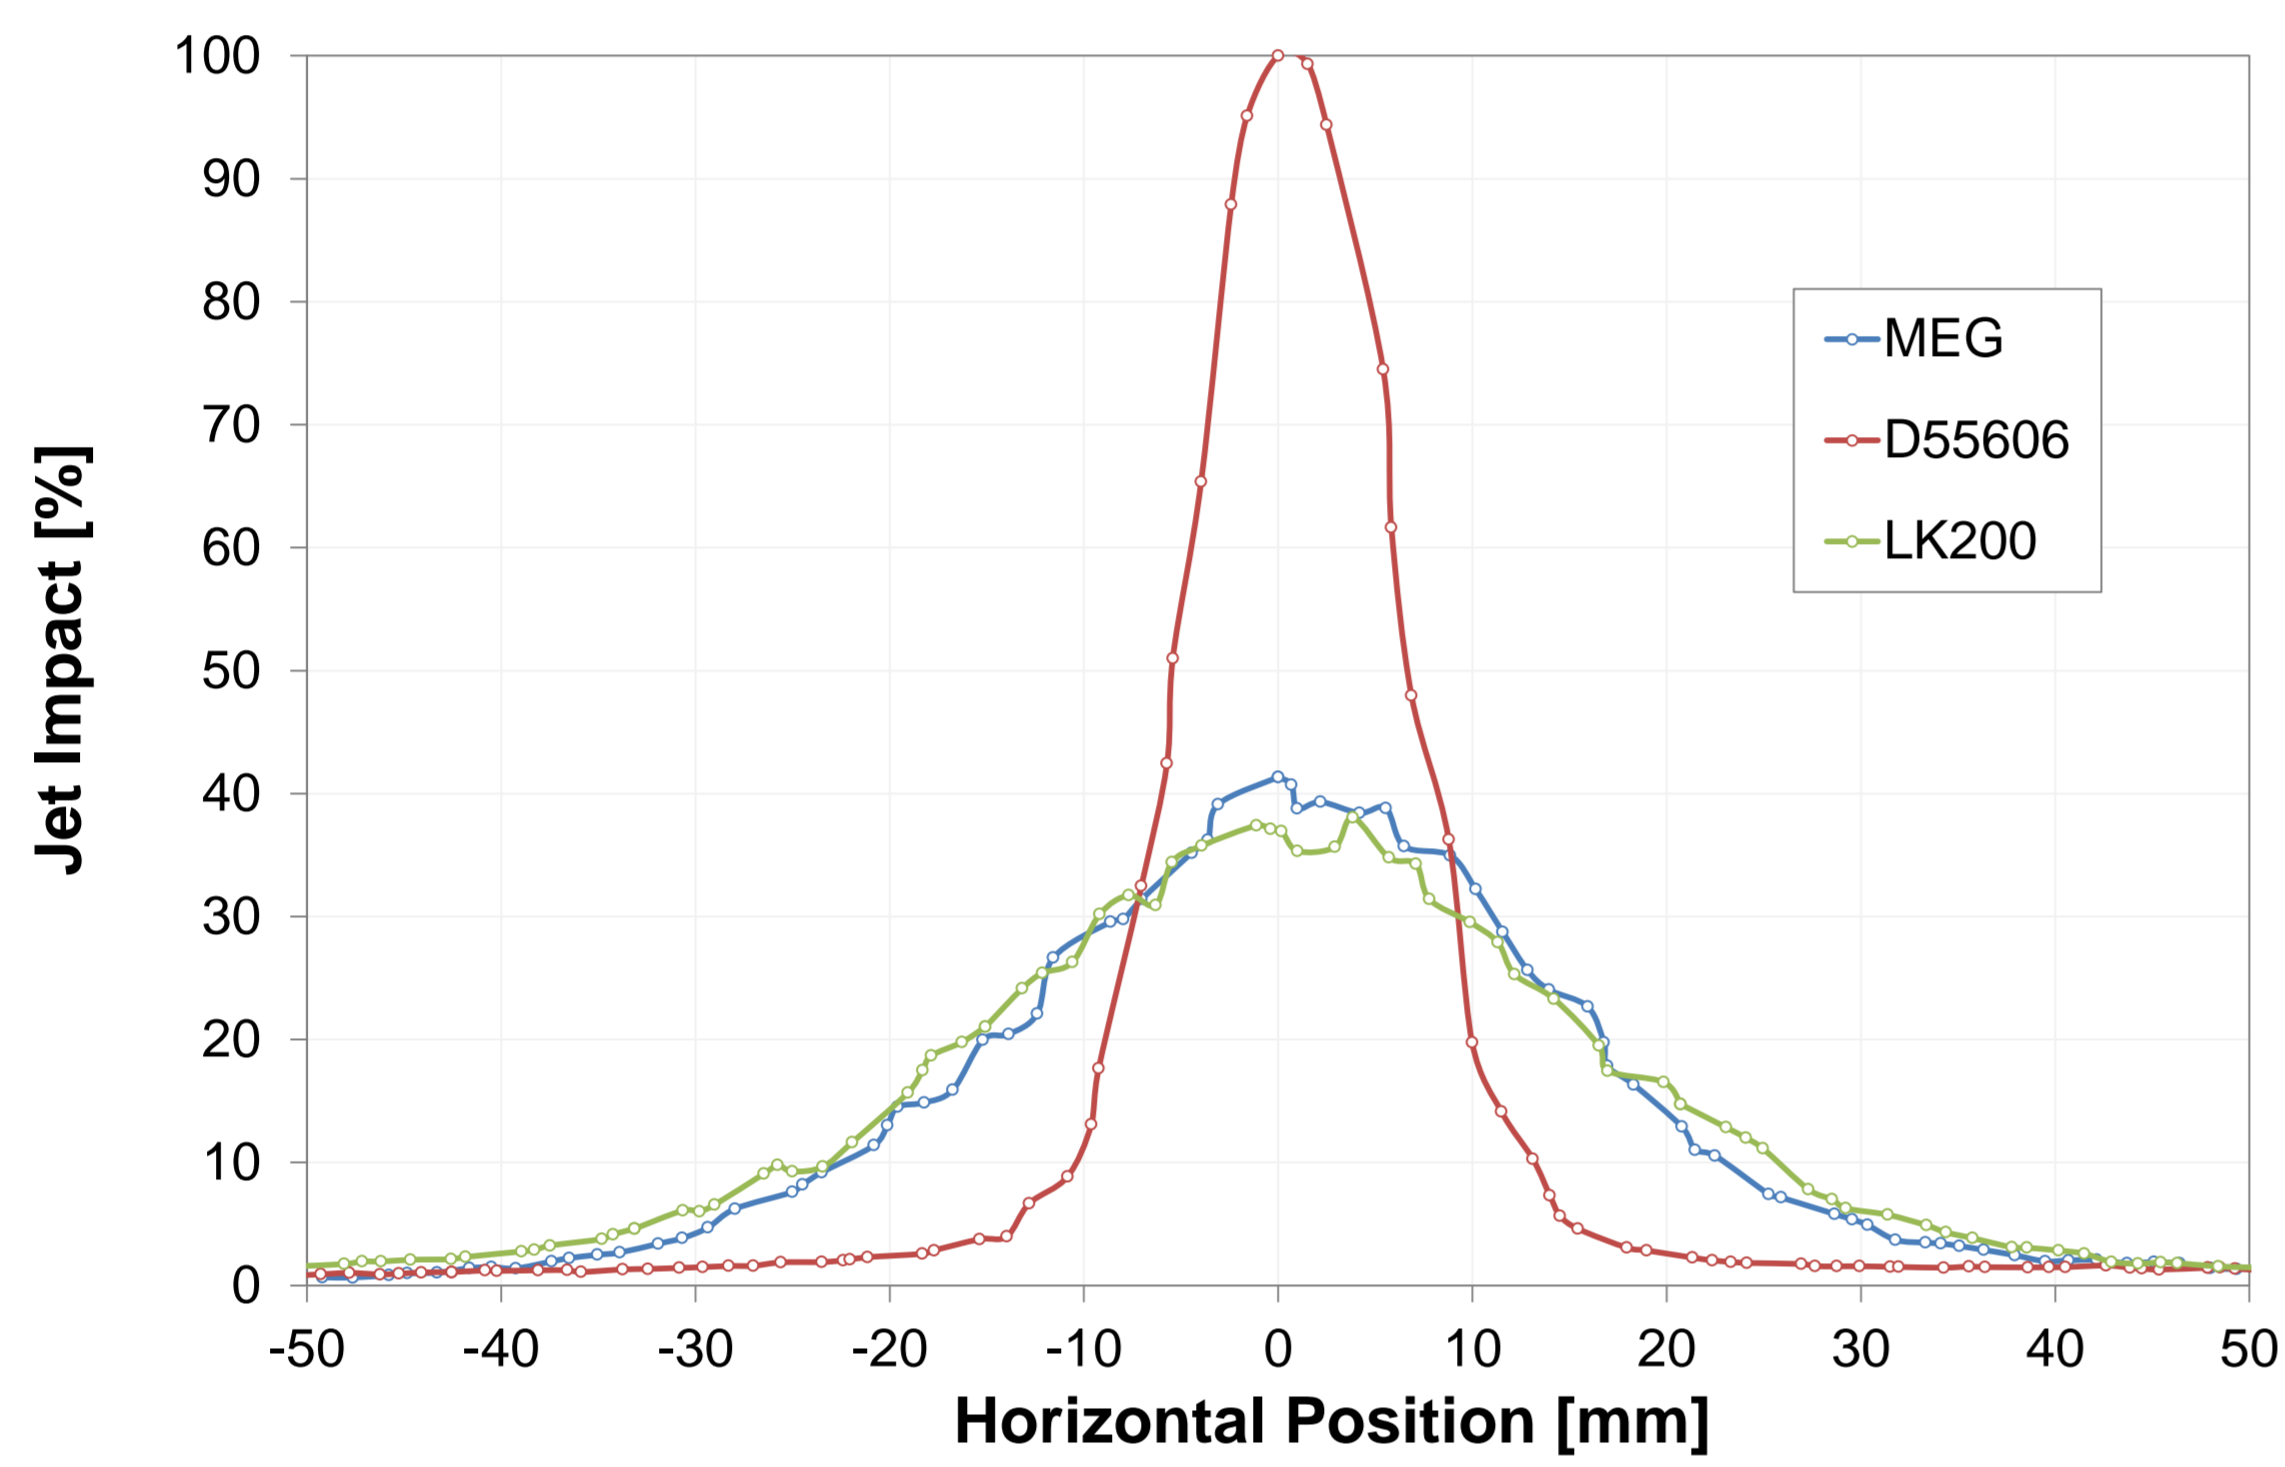


2D-Impact Test Conditions

- single nozzle mounted on AA190 tank washer
- nozzle distance to sensor 700 mm
- water pressure in front of AA190 at 20 bars
- D55606-B1/4-0036-SS & 1/8MEG0040 @ ca. 35 LPM, LK200-d4mm @ ca. 39 LPM

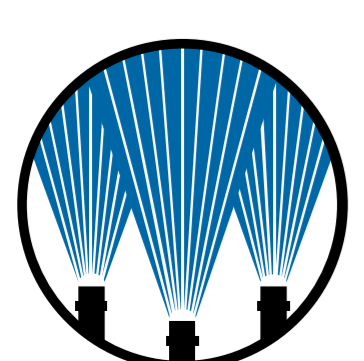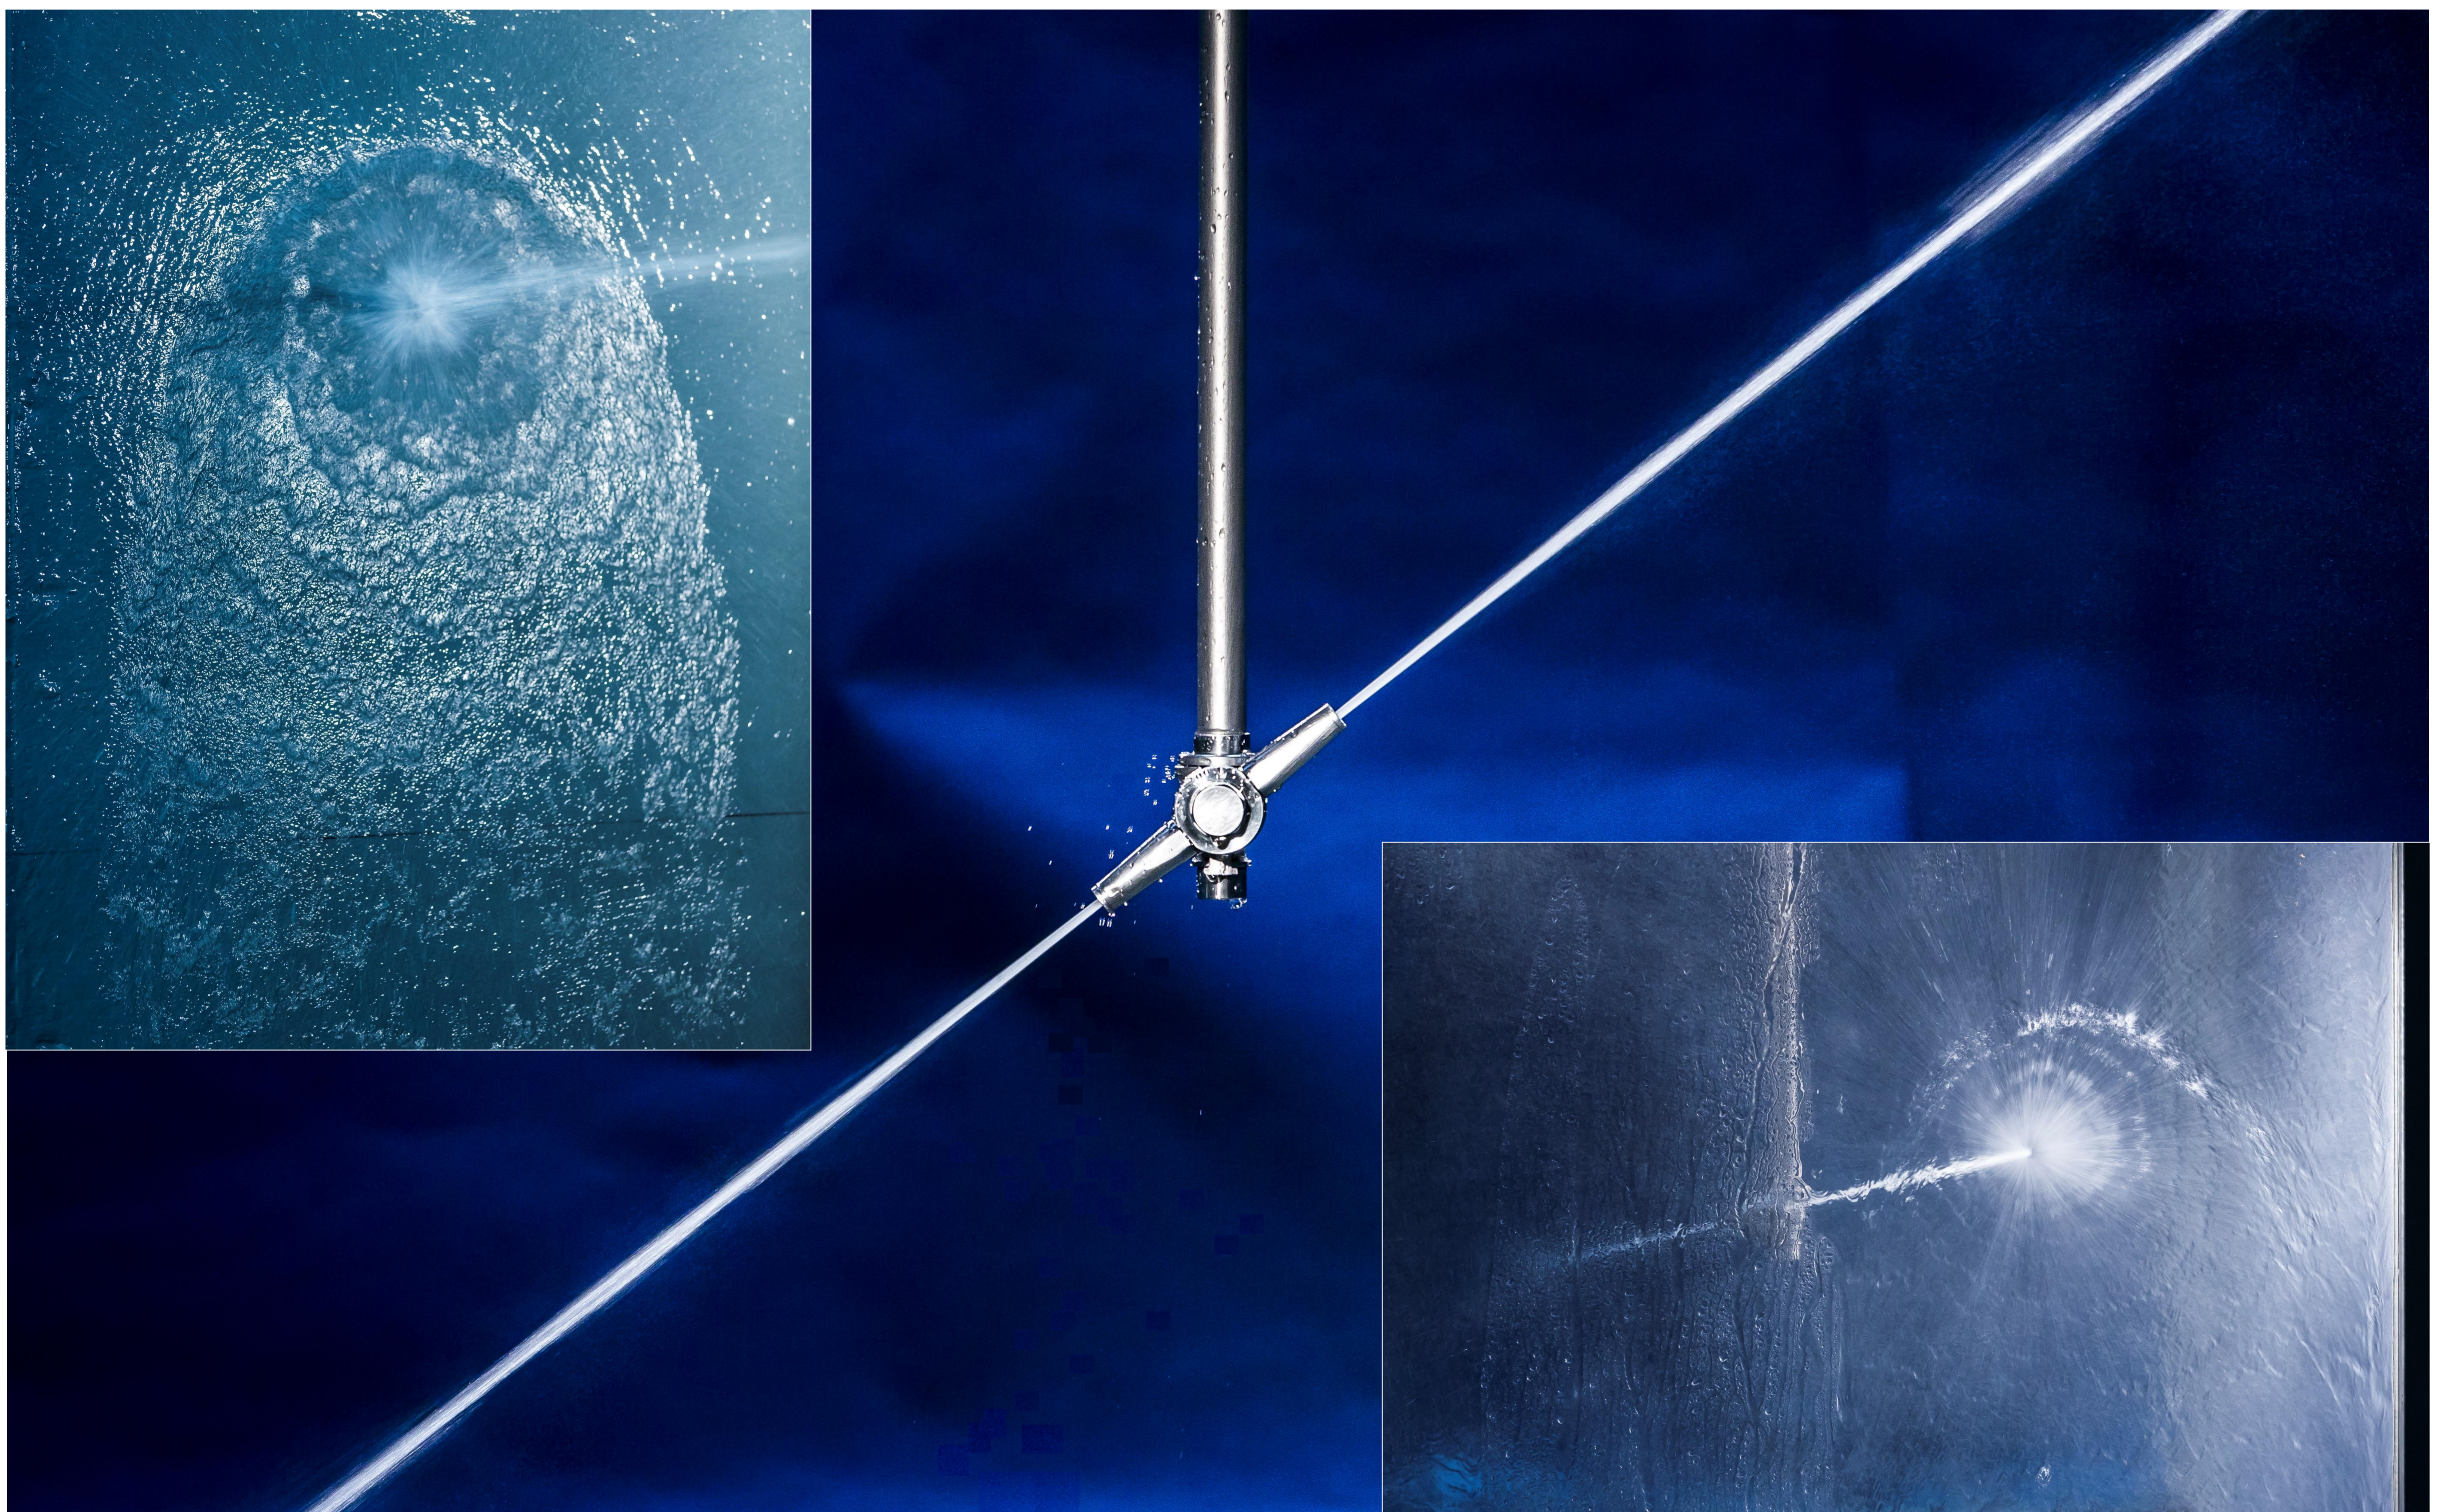


Spraying Systems Co.
Experts in Spray Technology



Spray Nozzles



Spray Control



Spray Analysis



Spray Fabrication